

H10FN

Fiber Optic Transceivers


Specification V1.5

Features



- One Neutrik opticalCON interface, compatible with LC-LC interface, with transmission speeds up to 10Gb/s
- 10 Neutrik RJ45 Ethernet ports, with a transmission rate of up to 1Gb/s per channel
- Equipped with the SFP module of which the transmission distance is 2km (the SFP module supporting a transmission distance of 20km is optional)
- Support photoelectric conversion
- Hot pluggable
- Single mode twin-core fiber

Interface Description

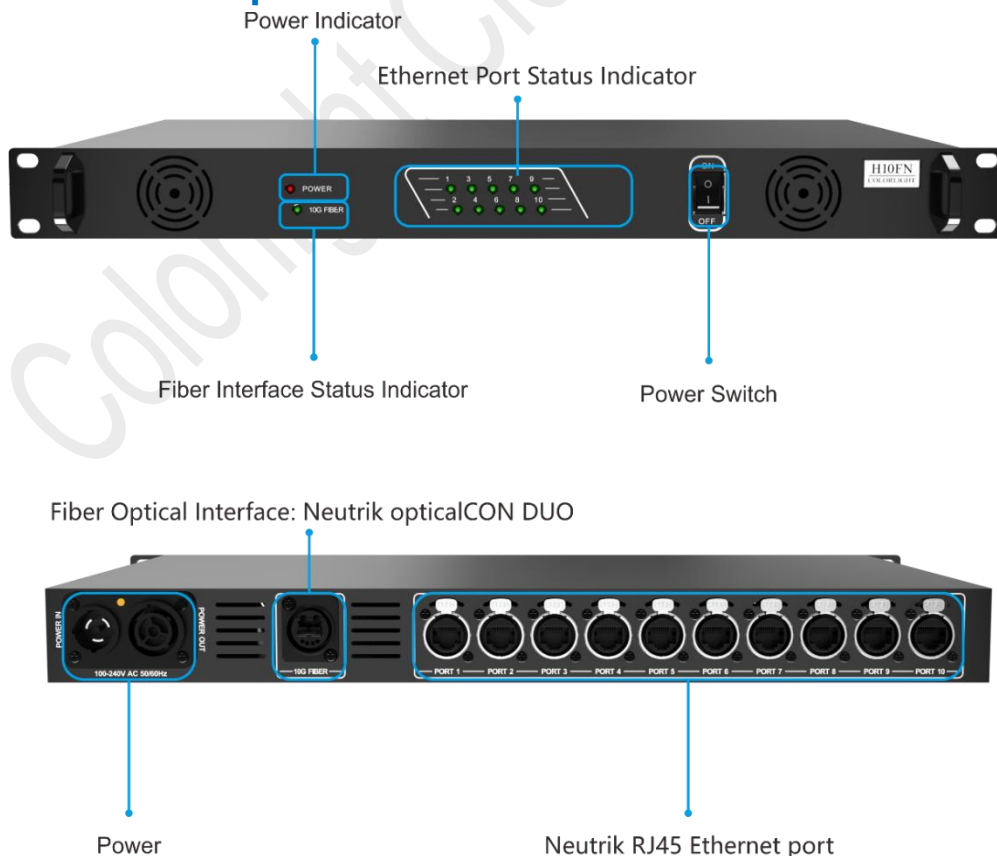

Application Diagram

Used in conjunction with the Z6 PRO




Specification

Model		H10FN
SFP module	Rate	10Gb/s
	Specification	Dual-LC fiber port, wavelength: 1310nm, transmission distance: 2km
Electrical specification	Power supply	AC100~240V, 50/60Hz
	Power consumption	30W
Operating environment	Temperature	0°C~70°C/32°F~158°F
	Humidity	10%RH~80%RH, non-condensing
Storage environment	Temperature	-25°C~80°C/-13°F~176°F
	Humidity	10%RH~90%RH, non-condensing
Device specification	Dimensions	482.6mm×44.0mm×297.5mm/19"×1.7"×11.7"
	Net weight	3.2kg/7.0lbs

Dimensions

Unit: mm

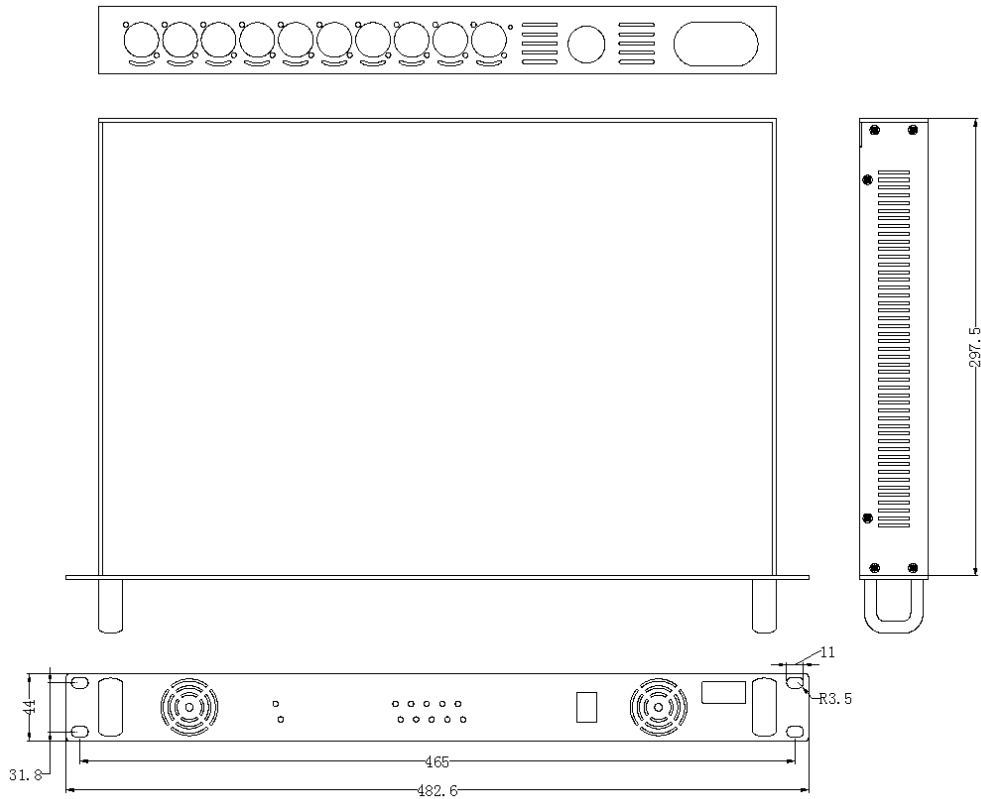

Statement

Thank you for purchasing the product of Colorlight Cloud Tech Ltd. If you encounter any problems during use or have any suggestions, please contact us through official channels. We will do our best to provide support and listen to your valuable suggestions. We will constantly make improvements on technical specifications but without notice. You can visit www.colorlightinside.com to get more updated information.

Colorlight Russia and Belarus: www.powerlight.ru

